



CaTop TVB

UDB-A

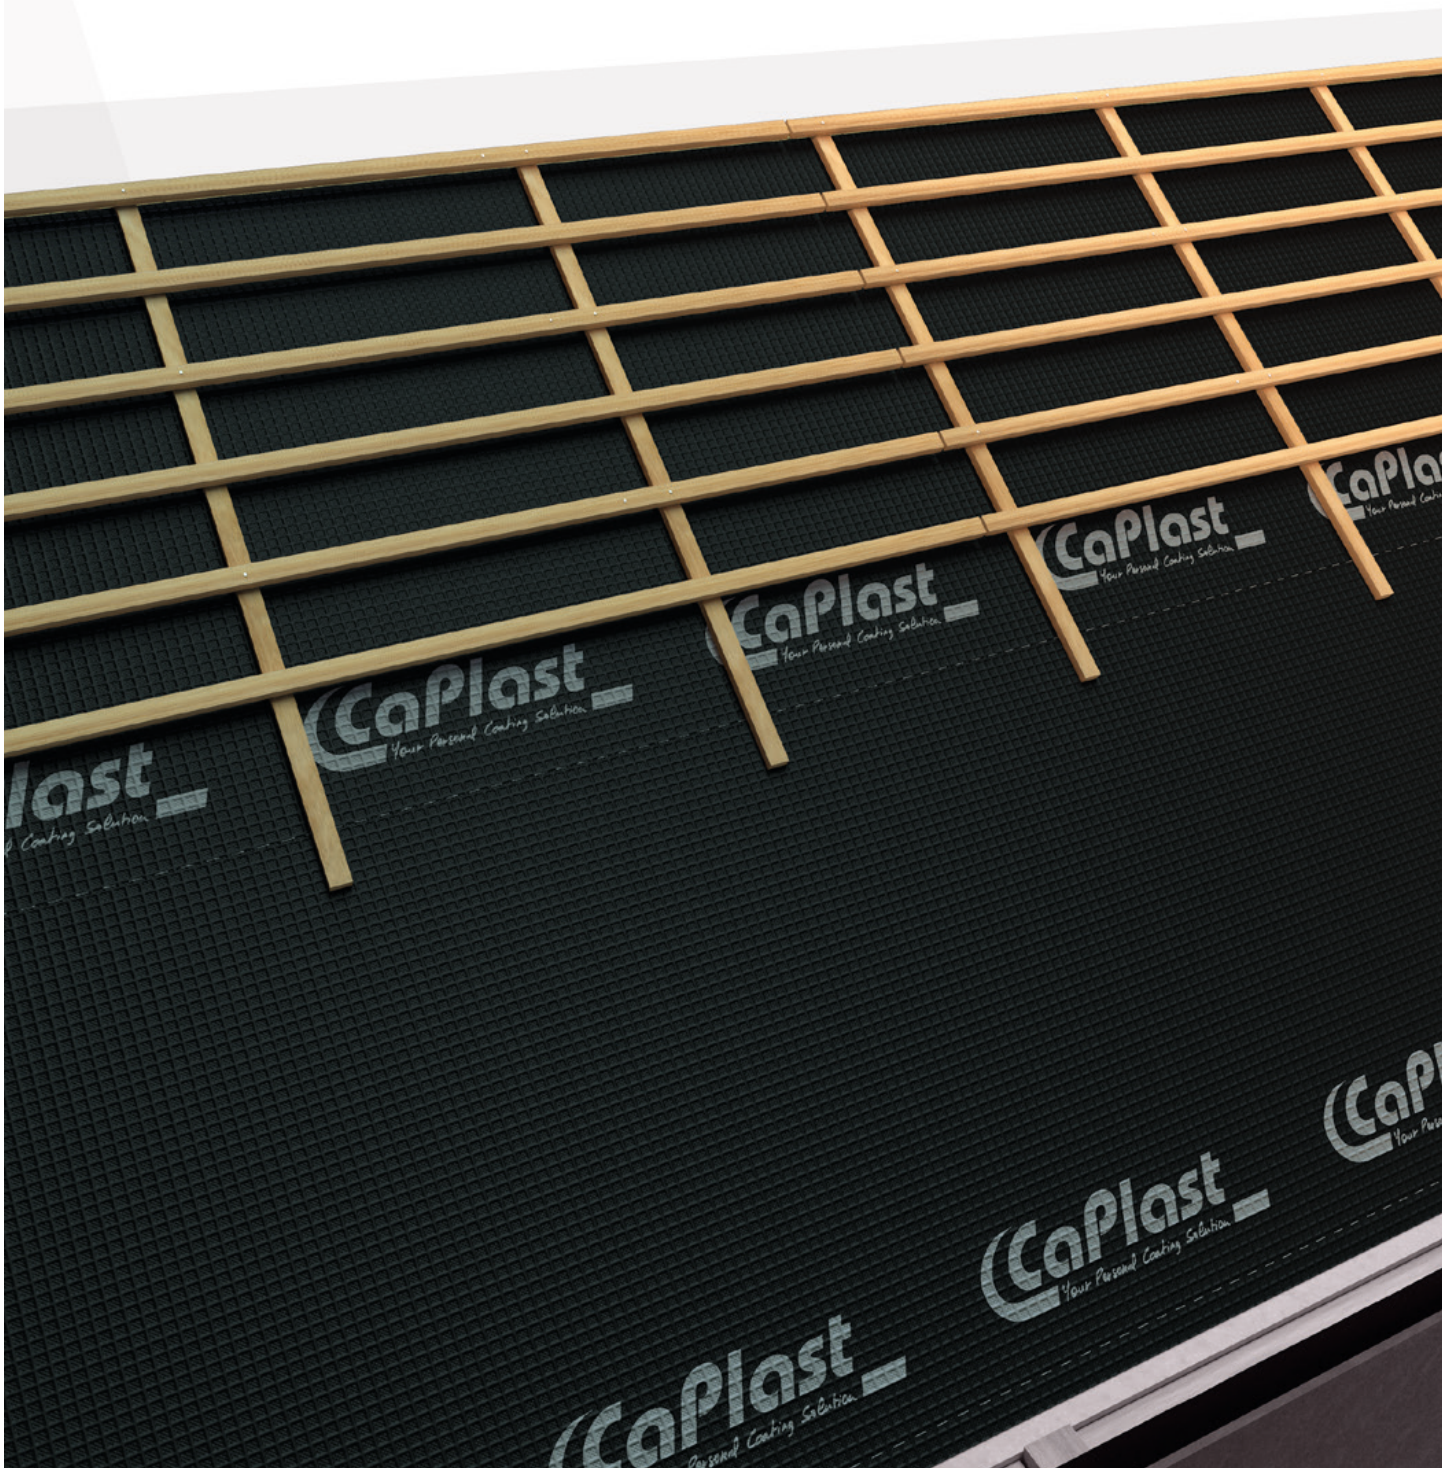

SYSTEMATIC SAFETY AND ENERGY EFFICIENCY

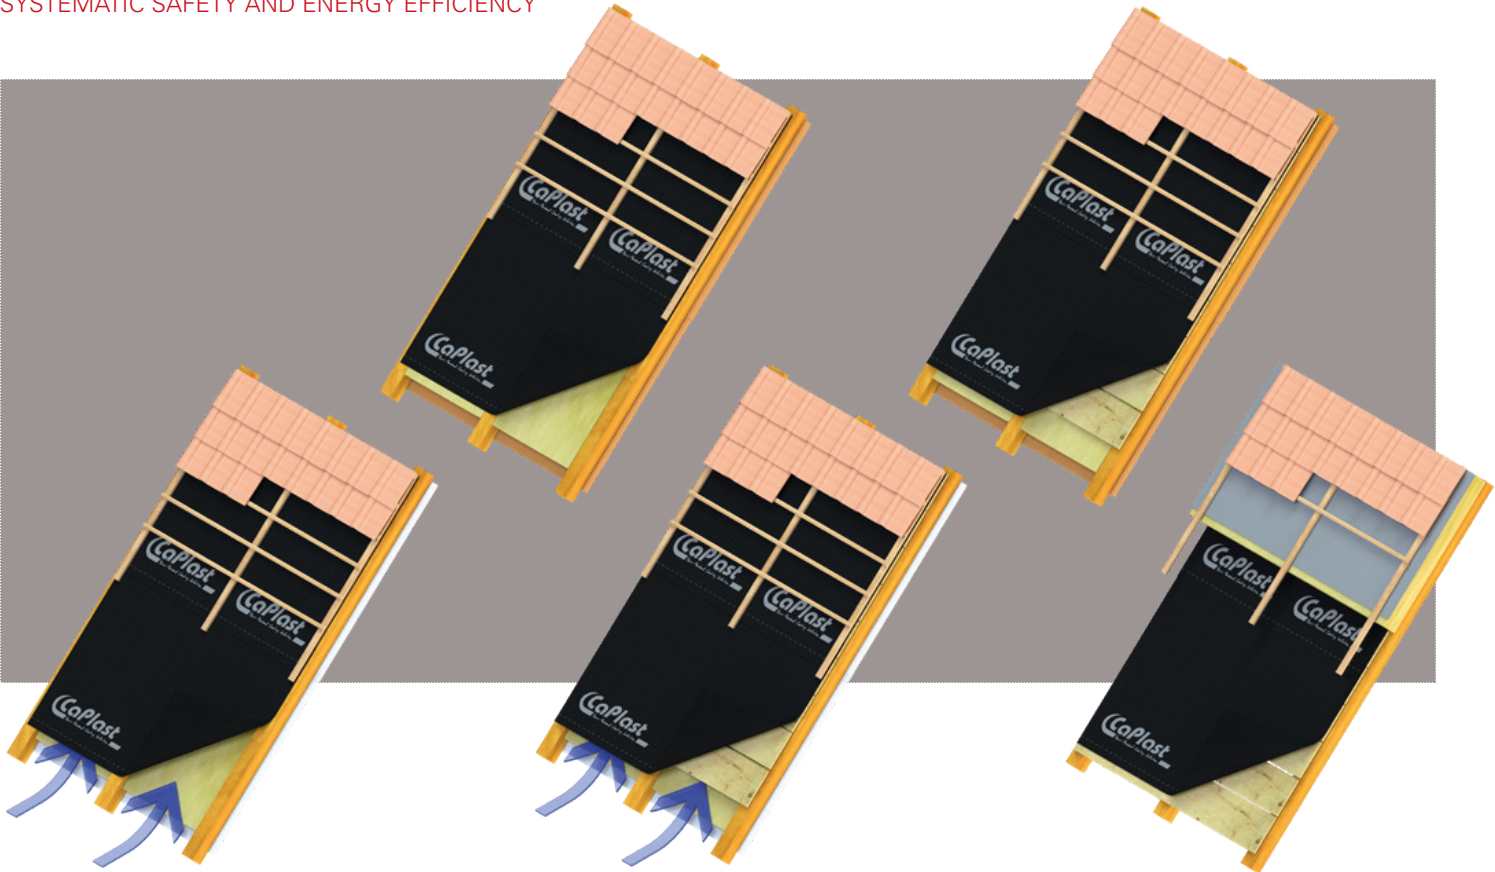

CaTop TVB is a robust, non-permeable underlay, in accordance with DIN EN 13859-1. The membrane contains a lattice reinforcement, laminated with an insulating non woven fabric. This extremely weather resistant membrane is ideal as a temporary roof covering on pitched roofs with slate, shingle or tile covering.

When working with the material it is necessary to observe the applicable standards, the generally recognized rules of manufacturers as well as the CaPlast laying information. Subject to technical modifications.

FIELDS OF APPLICATION
Special underlay membrane with rear ventilation
Shingle roofing or slate roofing
On-roof insulation
Temporary roof covering
BENEFITS
Approved sealing against driving rain
Extremely high anti-tear values
Robust and reliable
Secure laying and easy handling

TECHNICAL DATA	
Weight (g/m²)	165 ± 10%
Building material	E
Resistance to water penetration	W 1
s _d -value (m)	10 ± 3
Tear resistance L/T (N/5 cm)	400/360 ± 30
Elongation L/T (%)	15/18 ± 5
Nail tear resistance L/T (N)	350/400 ± 35
Temperature resistance (°C)	- 40 to + 80
Outdoor exposure (UV)	max. 3 months (ME)
Roll width/Roll length (m)	1.50/50

PRO SE 04/19 EN