



## CaTop XL (SK)

**UDB-A**  
**USB-A**

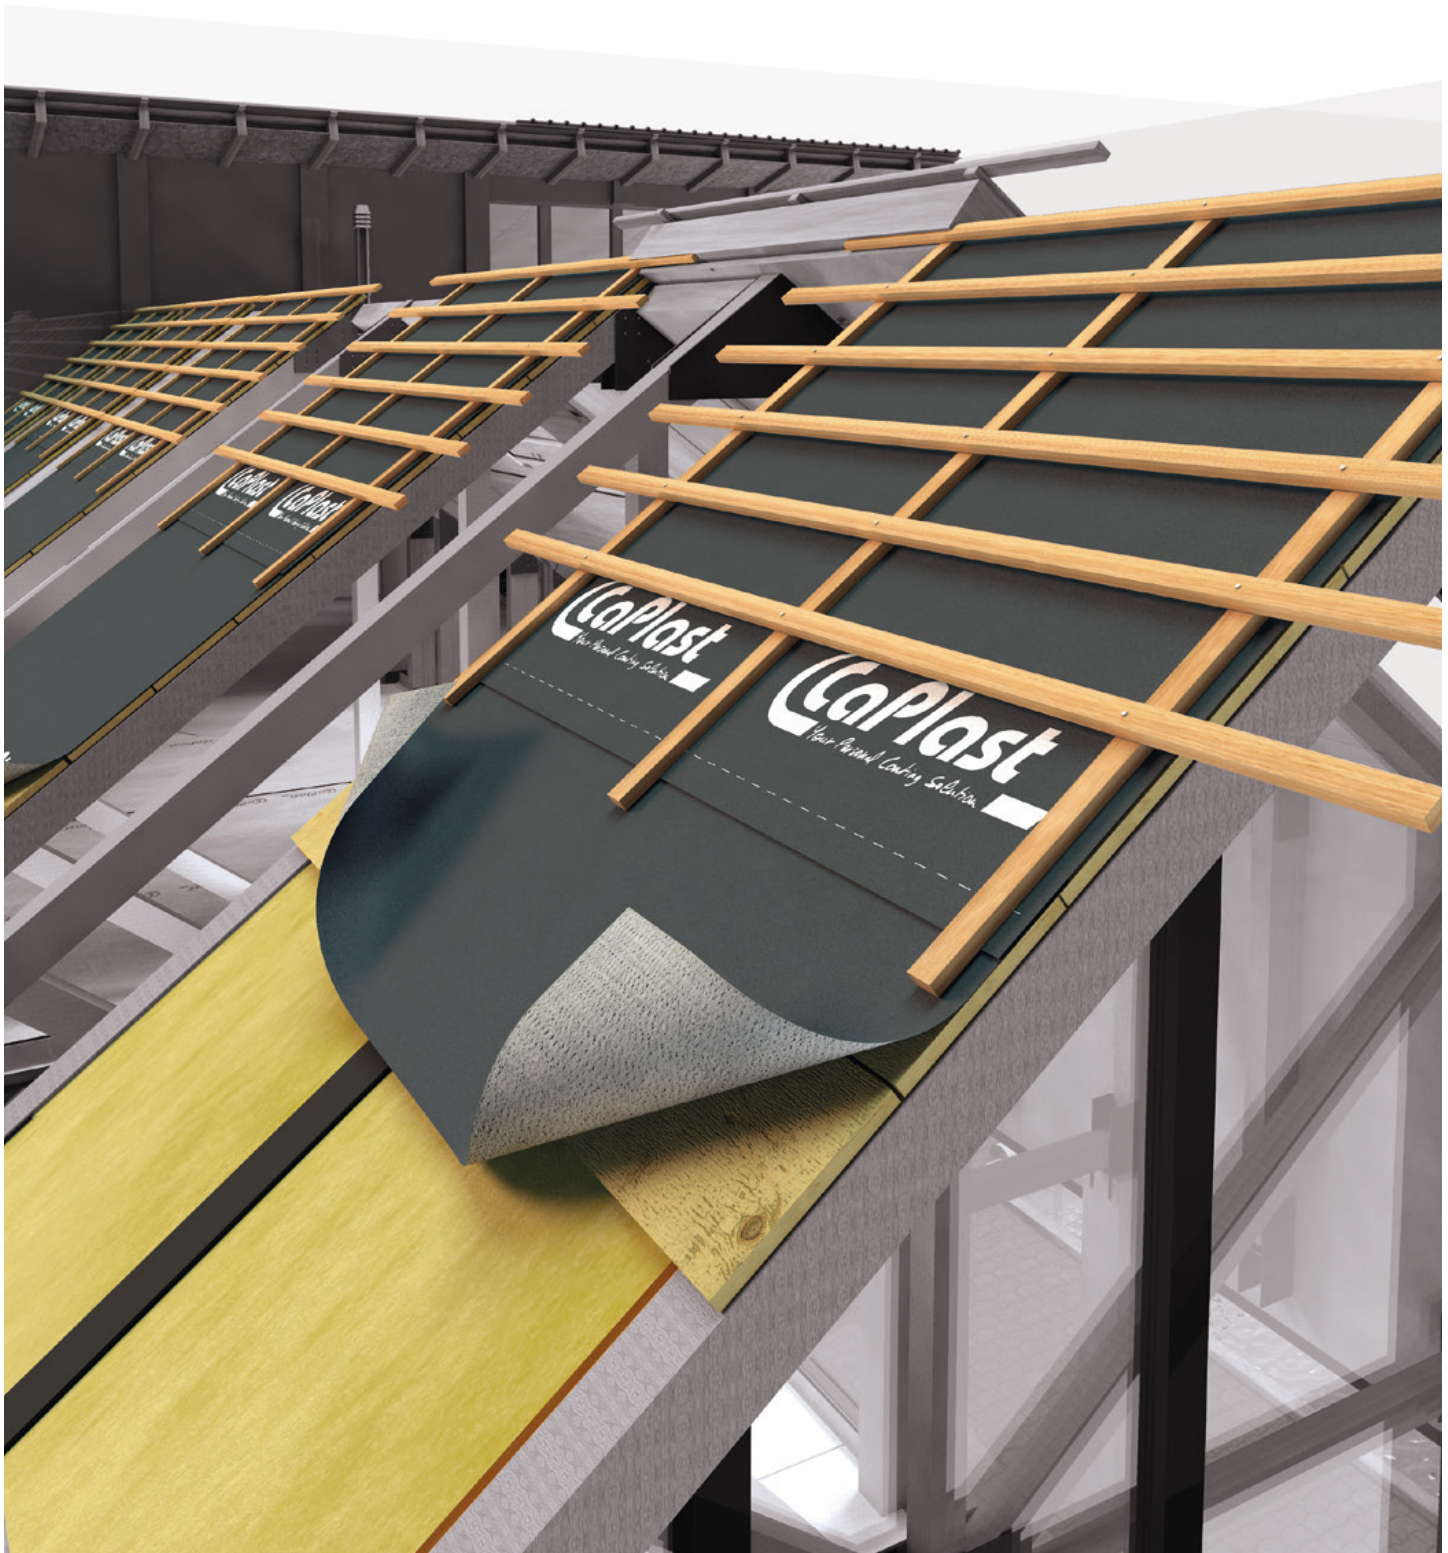

# CaTop XL (SK)

## SYSTEMATIC SAFETY AND ENERGY EFFICIENCY

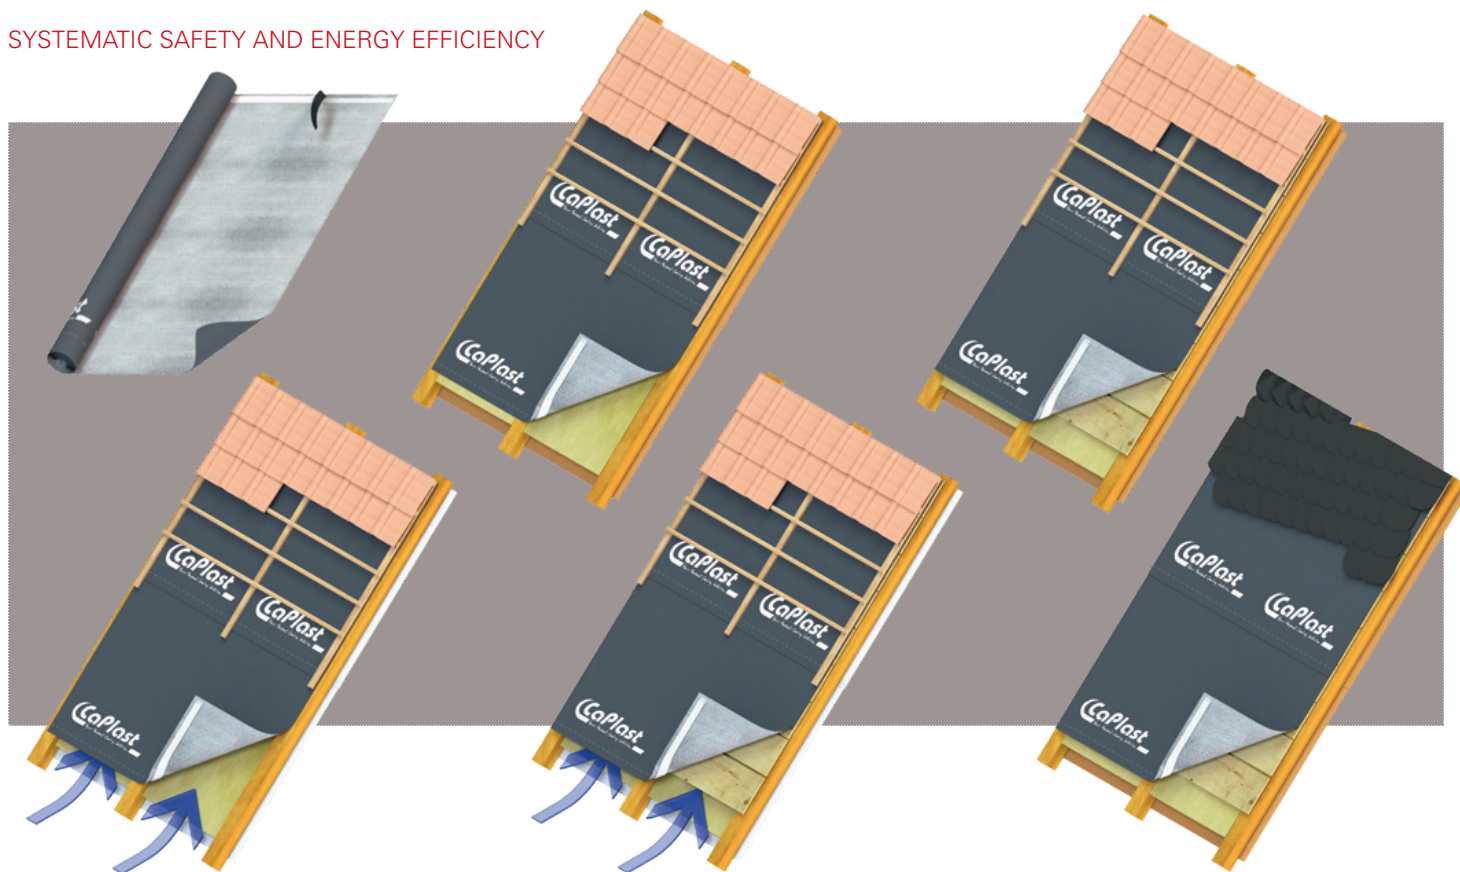

CaTop XL SK is an energy-efficient, diffusion permeable, premium sarking membrane, in accordance with DIN EN 13859-1, equipped with an integrated self-adhesive strip, and available without self-adhesive strip as CaTop XL. It consists of a non-woven PES material and an innovative, durable polyurethane coating. As a premium product, it is perfectly designed for use as a wind-resistant, rainproof sarking, underlay or temporary roof covering.

When working with the material it is necessary to observe the applicable standards, the generally recognized rules of manufacturers as well as the CaPlast laying information. Subject to technical modifications.

### FIELDS OF APPLICATION

- Sarking (UDB-A) and underlay (USB-A)
- Temporary roof covering / rainproof roof lining
- Formwork membrane
- Rear ventilated and non rear ventilated constructions
- Renovation work and new constructions

### BENEFITS

- Integrated self adhesive strips
- Approved sealing against driving rain
- Extremely high levels of resistance to abrasion and scratches
- Impervious to wind, water and driving rain
- Secure laying and easy handling
- Resistant to oil and tenside

### TECHNICAL DATA

Weight (g/m²)	220 ± 10%
Building material	E
Resistance to water penetration	W 1
s <sub>d</sub> -value (m)	0.15 ± 0.08
Resistance to water pressure (cm WS)	> 400
Tear resistance L/T (N/5 cm)	300/350 ± 60
Elongation L/T (%)	50/50 ± 15
Nail tear resistance L/T (N)	220/200 ± 35
Temperature resistance (°C)	- 40 to + 80
Outdoor exposure (UV)	max. 3 months (ME)
Roll width/Roll length (m)	1.50/50 3.00/50

Certification Number - P 3471/1690-MPA BS